


### Newlink Cat-6 UTP Patch Panel 48-port

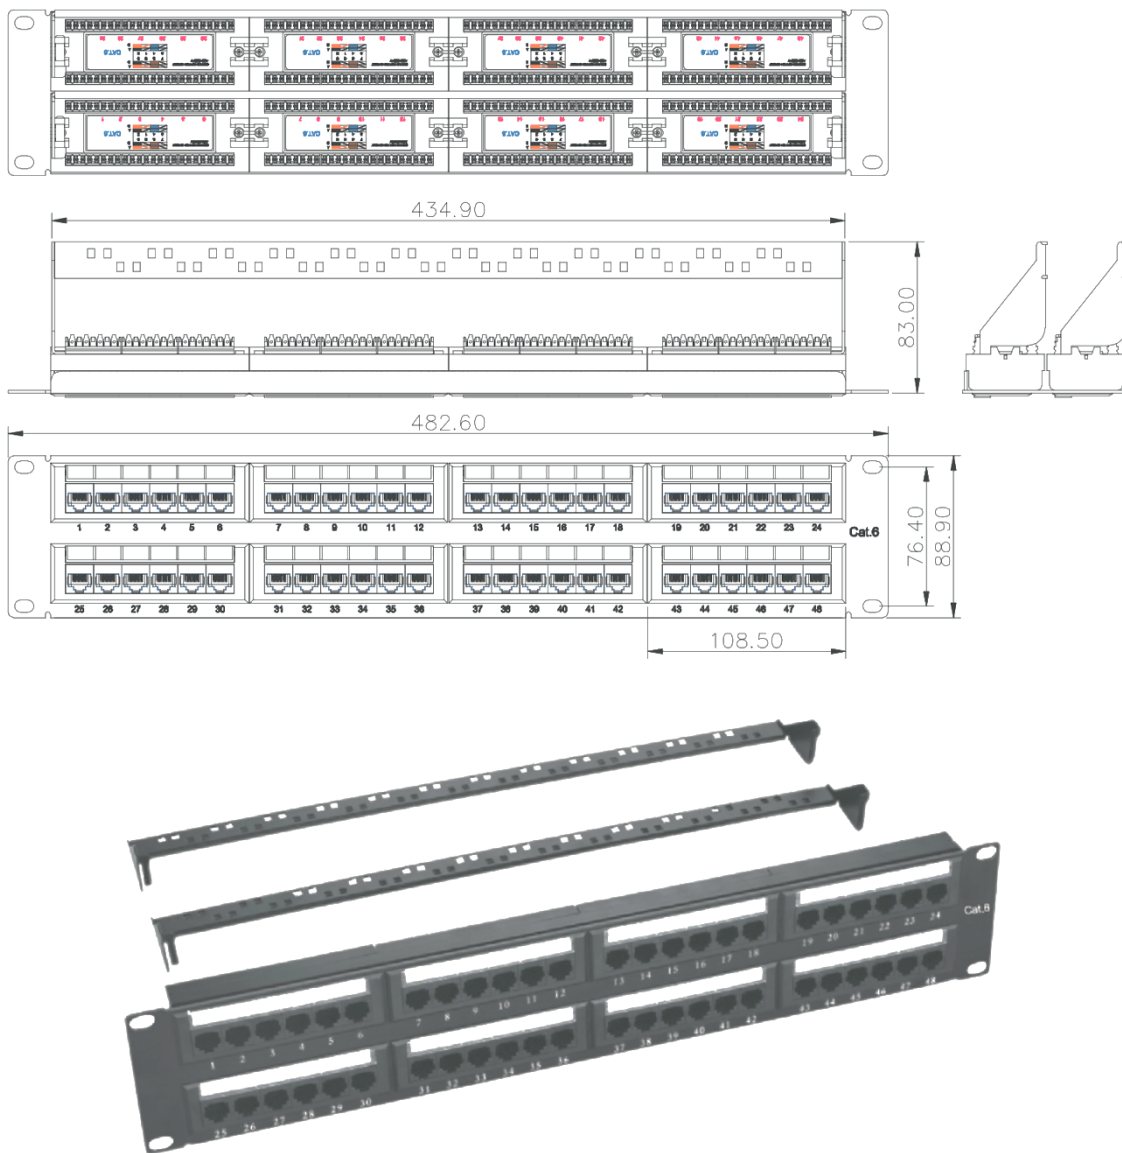

#### Technical Specifications:

##### Electrical Specifications:

Voltage Rating:	125 VCA RMS
Current Rating:	1.5 Amps
Contact Resistance:	20 Milliohms Max

Insulation Resistance:	100 Megohms Min @ 500VDC
Dielectric Strength:	750 VAC RMS @ 60Hz/1min
C6 Permanent Link:	Conform with ANSI/TIA/EIA-568 B.2-1
<b>Mechanical Specifications:</b>	
Housing Material:	PBT + 15% GF
Panel Frame:	S45C, Powder Coating in Black
IDC Material:	PC, Contact: Phosphor Bronze, Tin Plate
RJ45 Jack Life:	750 Cycles (min)
IDC Life:	200 Times min
Wire:	AWG 22-24
Perm. Link tested under Fluke4300, Class E in lab. The worst pair NEXT redundancy $\geq$ 2.0dB	
<b>Environmental:</b>	
Storage Temp:	-40 to +70C
Operation Temp:	-10 to +60C
Mates with modular plug conforming to FCC Part 68, Subpart F	

**Ordering Information:**

Part number	Description
NEW-2666648	Newlink Cat-6 UTP Patch Panel 48-port