


### Newlink 12-Port Cat 6A Modular Patch Panel

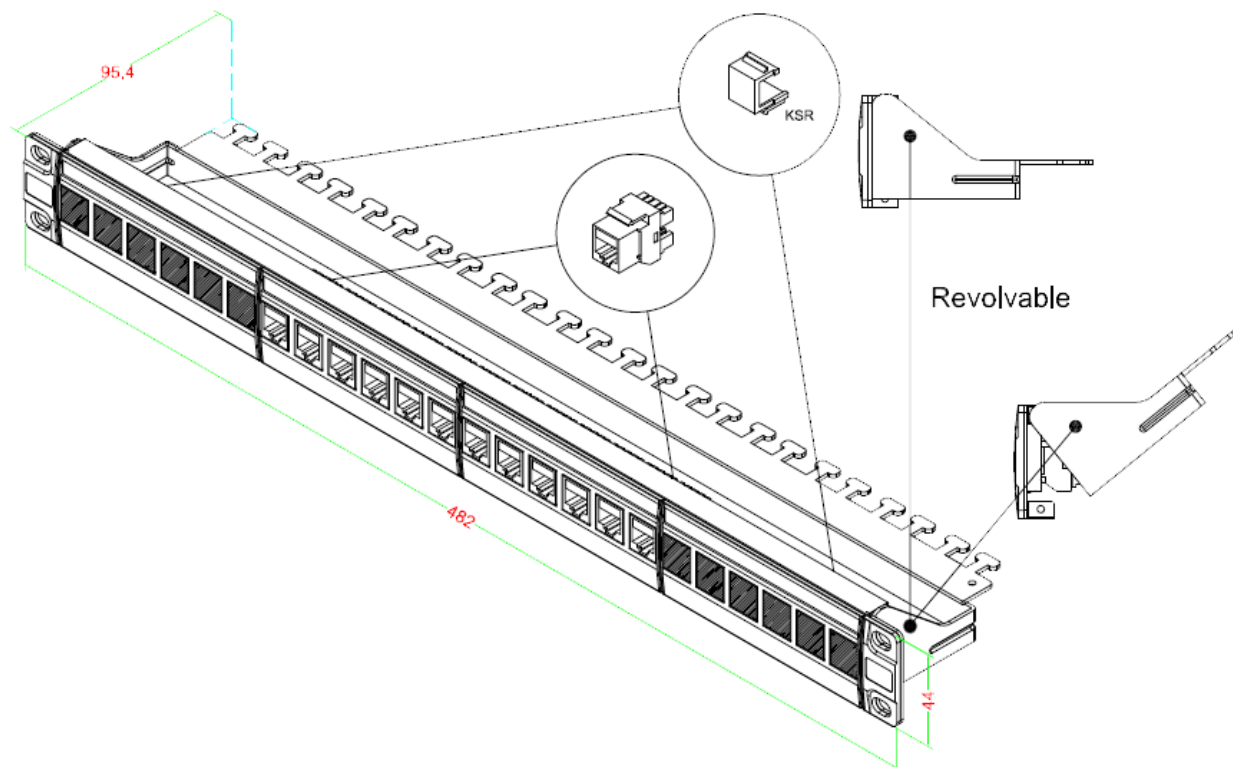

#### Technical Specifications:

Performance:	Meets C6A EIA/TIA 568C Standard
<b>Materials:</b>	
Front Plate:	Fireproof ABS UL-94V0
Panel:	Metal (SPCC)
Cable Management:	Metal (SPCC)
Keystone Body:	Fireproof ABS UL-94V0
Jack:	8P8C 50 micro inches gold plated
PCB:	FR-4/UL-94V0
IDC Body:	Fireproof ABS UL-94V0
IDC Pin:	Bronze & Tinned
IDC Description:	For 22-26 AWG, for 110 or Krone punch-down tool
<b>Electrical Specifications:</b>	
Insulation Resistance:	500M ohms (min)
Contact Resistance:	20m ohms (max)
Current Rating:	1.5 Amps
DC Resistance:	0.1 ohms (max)

Withstanding Voltage:	1000 VAC RMS @ 60Hz/1min
<b>Mechanical Specifications:</b>	
IDC Punch Down Cycle:	Over 250 Cycles (min)
Jack Insertion Cycle:	Over 2000 Cycles (min)
Operation Temp.:	-40C to +70C

**Ordering Information:**

Part number	Description
NEW-2777712	Newlink 12-Port Cat 6A Modular Patch Panel