


### 48-Port Cat 6A UTP Modular Angular Patch Panel

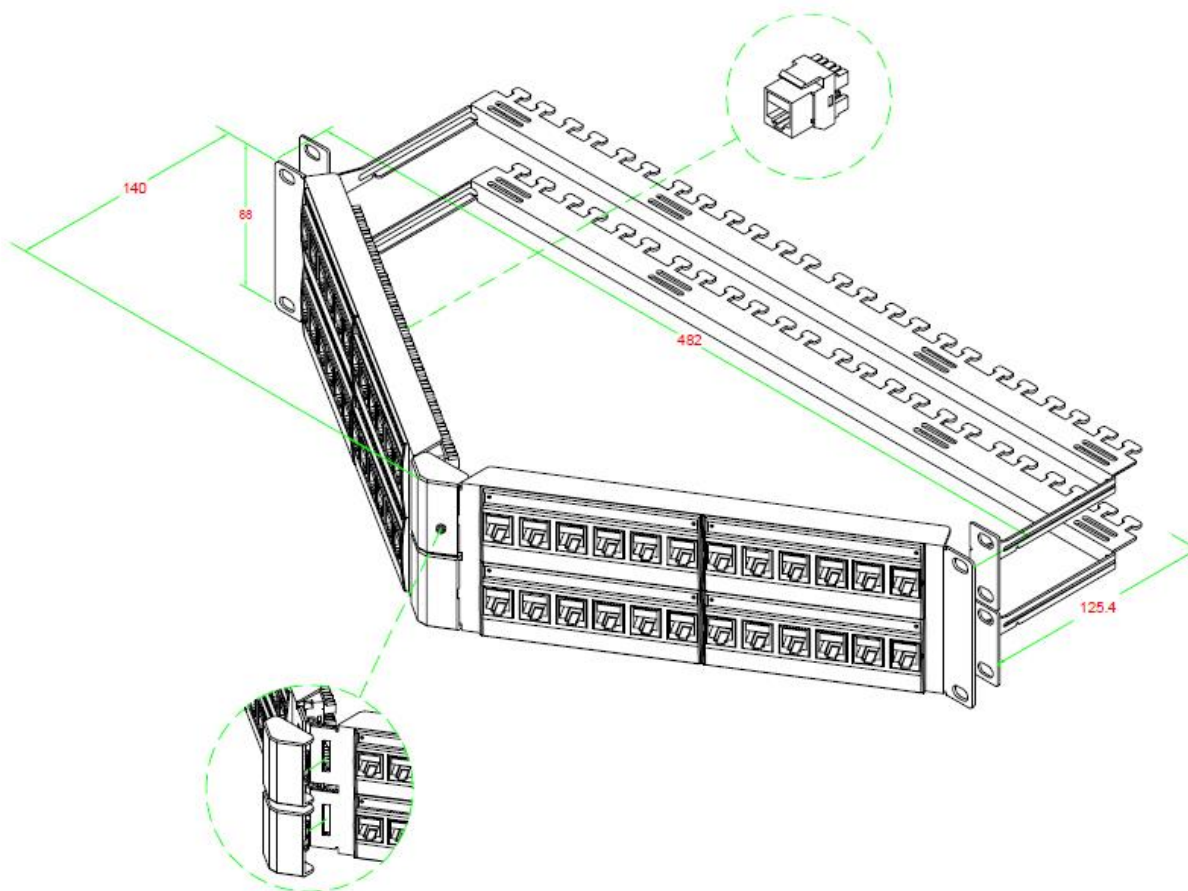

#### Technical Specifications:

<b>Performance:</b>	Meets Cat-6A EIA/TIA 568C Standard
<b>Materials:</b>	
<b>Front Panel:</b>	Fireproof ABS UL-94V0
<b>Panel:</b>	Metal (SPCC)
<b>Cable Management:</b>	Metal (SPCC)
<b>Angled Block:</b>	Fireproof ABS UL-94V0
<b>Label Cover:</b>	Fireproof PC
<b>Keystone Body:</b>	Fireproof ABS UL-94V0
<b>Jack:</b>	8P8C 50 micro inches gold plated
<b>PCB:</b>	FR-4 / UL-94V0

<b>IDC Body:</b>	Fireproof ABS UL-94V0
<b>IDC Pin:</b>	Bronze & Tinned
<b>IDC Description:</b>	For 22-26 AWG. For 110 or Krone punch-down Tool

#### Electrical Characteristics:

Insulation Resistance : 500M ohms (min.)
Contact Resistance: 20m ohms (max.)
Current Rating : 1.5 Amps
DC Resistance: 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

#### Mechanical Specifications:

- Operation Temperature: -40 °C ~ +70 °C
- Jack Insertion Cycle: Over 2000 Cycles (min.)
- IDC Punch Down Cycle: Over 250 Cycles (min.)

#### Ordering Information:

Part Number	Description
NEW-2773348	48-Port Cat 6A UTP Modular Angular Patch Panel