
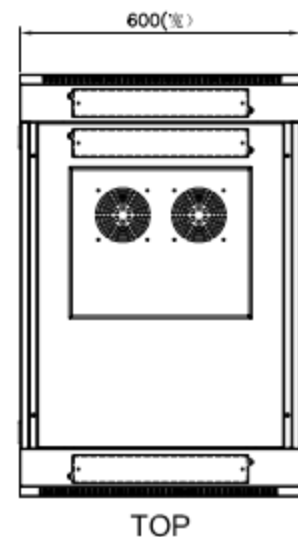
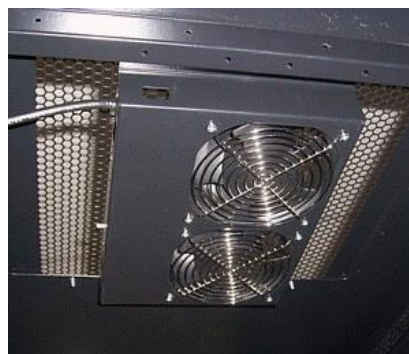


78" (42RU), Vented front and back door (2 fans and 1 power strip included (6-outlet)

Newlink offers a unique all steel enclosure that is both strong and attractive. Our design allows us to maintain tighter tolerances for door clearance, better stability and superior heat dissipation. Comes fully assembled and includes two Turbo Fans and a 6-outlet power strip.



- External: 78"High x 24"Wide x 39" ½ Depth. Internal mounting 19"Wide x 32-34" Depth
- Vented Front Door w/ lock
- Vented Rear Door w/ Lock
- Removable Side Panels
- 19" Mounting Uprights Painted, Square Holes, EIA Spacing w/ M6 Clip Nuts and Hardware.
- Weight: 294
- Standard EIA 310 D
- Material: SPCC Cold Rolled Steel
- Max. Static Load: 800Kg

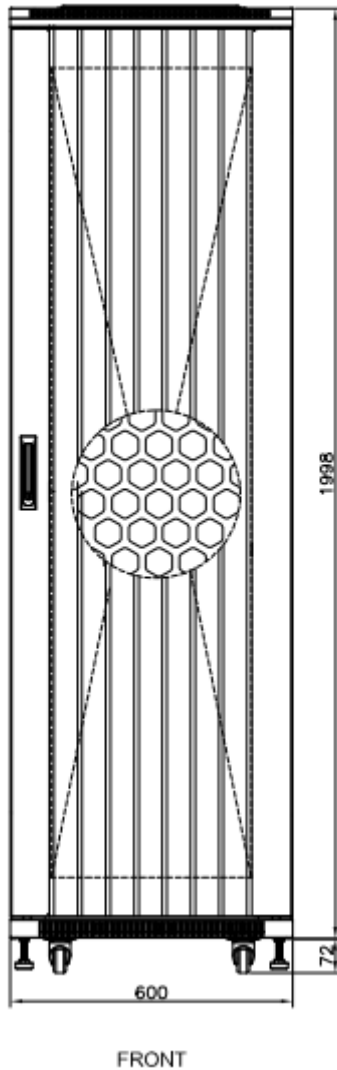

NEWLINK

Cabling Systems

NEW-0978401

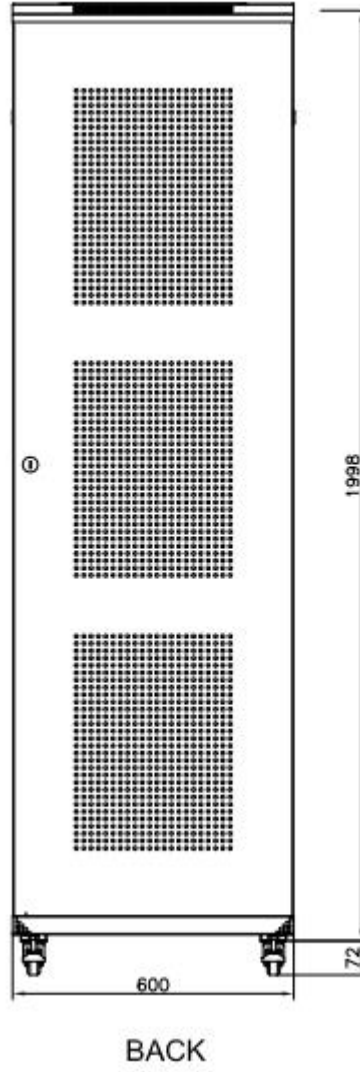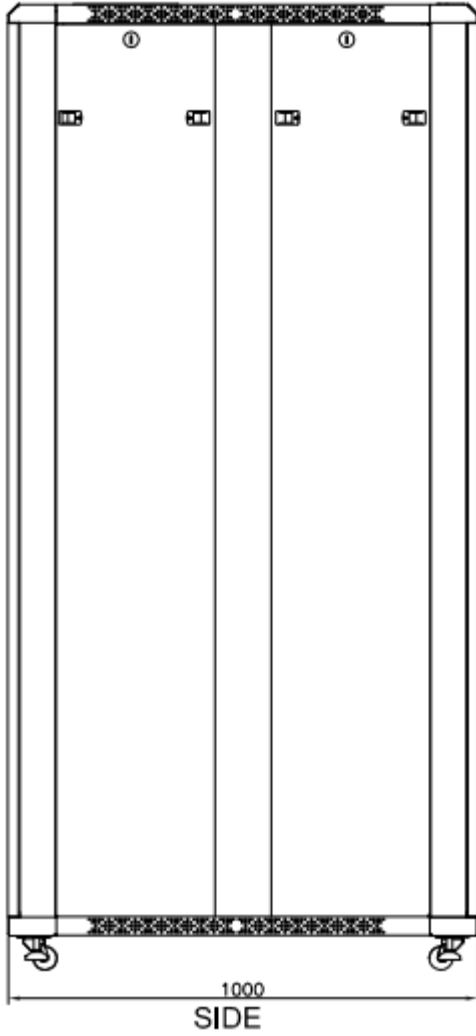

Technical Specifications:

Style:	Standalone cabinet with vented front and back doors
Size:	External: 78"High x 24"Wide x 39" ½ Depth. Internal mounting 19"Wide x 32-34" Depth
Finish:	Powder Coated, Black
Application:	Housing of Datacomm Equipment, Telecommunications Equipment, Computer Control Room Equipment
Cabinet Weight:	294 LBS
Max. Static Load:	800 Kg / 1760 lbs
Fans:	2 Fans Included
Power Strip:	6-outlet INCLUDED

Ordering Information:

Part Number	Description
NEW-0978401	78" (42RU), Vented front and back door (2 fans and 1 power strip included (6-outlet)