


Fiber Optic Cable – FTTH
Span: 100m

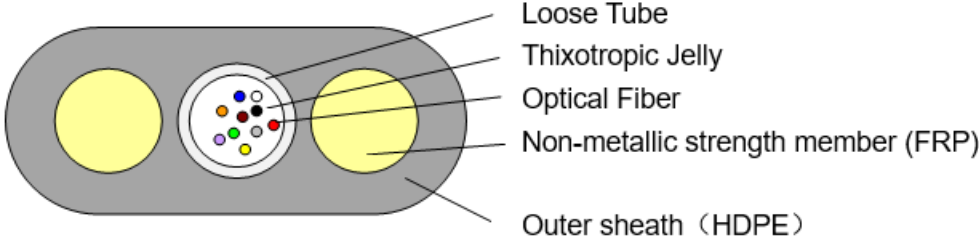

Optical fiber characteristics:

Category	Description		Specifications
			G.652D
Optical Specifications	Attenuation	@1310nm	≤0.36dB/km
		@1550nm	≤0.22dB/km
	Attenuation discontinuity		≤0.05 dB
	Attenuation vs. Wavelength	@1285~1330nm	≤0.05 dB/km
		@1525~1575nm	≤0.05 dB/km
	Zero Dispersion Wavelength		1300~1324nm
	Zero Dispersion Slope		≤0.092ps/(nm ² .km)
	Dispersion	@1310nm	≤3.5 ps/nm.km
		@1550nm	≤18 ps/nm.km
	Cable Cutoff Wavelength(λ _{cc})		≤1260nm
PMD		≤0.20ps/km ^{1/2}	
Effective Group Index of Refraction	@1310nm	1.4675	
	@1550nm	1.4681	
Geometric	Mode Field Diameter	@1310nm	9.2±0.4μm

Specifications		@1550nm	10.4±0.8µm
	Cladding Diameter		125±1µm
	Cladding Non-Circularity		≤1.0%
	Coating Diameter		243±7µm
	Coating/Cladding Concentricity Error		≤12µm
	Core/Cladding Concentricity Error		≤0.8µm
Mechanical Specifications	Proof Test level		≥1.0%
	Fiber Curl Radius		≥4.0m
	Fiber tensile strength		Proof-tested, at least 0.69 Gpa (100 kpsi)

Structure		Unit	Parameter
Fiber count		Fibers	12
Loose tube	Material	--	PBT
Strength Member	Material	--	Non-metallic strength member (FRP)
	Diameter	Mm	2.1
Cable diameter		mm	7.8*4.3(L*W)
Cable weight		Kg/km	Approx. 37
Bending Radius	Dynamic	mm	200
	Static	mm	100
Operating Temperature		°C	-30 --- +70
Max tensile strength		N	1335
Crush resistance		N/10cm	1000
Span		m	100

Fiber and Loose Tube coding. The color coding of the optical fiber shall be in accordance with:

Test Requirements:

No	Item	Test standard	Method	Acceptance criteria
1	Tensile test	IEC-60794-1-E1	-Max. Tensile strength -Sample length:50 meters -Time: 1minutes;	-Attenuation increase \leq 0.10dB
2	Crush test	IEC-60794-1-E3	-Load:1000N -Time: 1 minutes -Length: 100mm	-No splits or cracks in the outer jacket; -Attenuation increase $<$ 0.10dB,
3	Impact test	IEC-60794-1-E4	-Impact energy: 300g - Height:1 meter -Impact points: min.1 --Number of impacts: 5	-No splits or cracks in the outer jacket -Attenuation increase \leq 0.10dB(after the test)
4	Repeated bending	IEC-60794-1-E6	-R=200mm -1m cable length with 100N weight,30 cycles	- No splits or cracks in the outer jacket -Attenuation increase \leq 0.10dB(after the test)
5	Temperature cycling test	IEC-60794-1-F1	-Temperature step: +20°C \rightarrow -30°C \rightarrow +70°C \rightarrow -30°C \rightarrow +70°C \rightarrow +20°C -Time per each step: 12 hrs -Number of cycles: 2 cycles	-Attenuation variation for reference value(the attenuation to be measured before test at +20 \pm 3°C) \leq 0.10dB/km,
6	Water penetration test	IEC-60794-1-F5	-Water height: 1m -Sample length:3m -Duration of test: 24hrs	-No water leakage at the end of the sample
7	Drip test	IEC-60794-1-E14	-Five 0.3m samples suspended vertically in a climate chamber, raised temperature to +70°C	-No filling compound shall drip from tubes after 24 hr

Ordering Information:

Part Number	Description
NEW-9449012-100	12-Fiber Optic Cable – FTTH Span: 100m