




### ***Newlink Wire Mesh Cable Tray***

- Convenient Sizes
  - Width 4", 6", 8", 12"
  - Depth 2"
  - Length 2.9mts
- Electro Zinc Resistant Finish
- NEC Approved
- NEWMAX-25 Year Certification available (\*)
- UL Certified

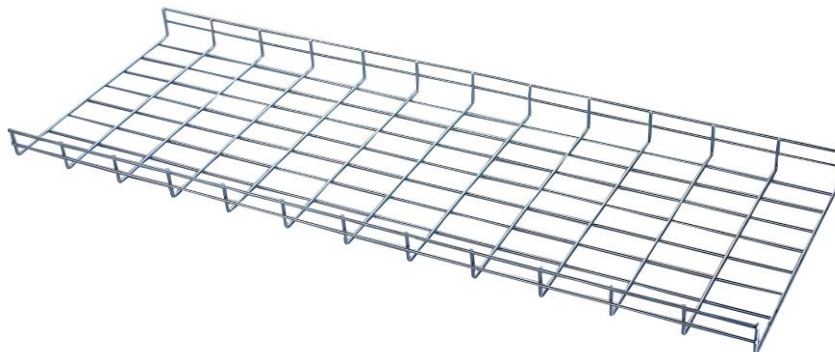

#### **Technical Specifications:**

<b>Steel</b>	<b>(Min. Yield = 33KSI) (35 KSI for Stainless)</b>
<b>Plain</b>	Hot rolled pickled and oiled steel per ASTM A569 or A570
<b>Pre-Galvanized</b>	Mill galvanized steel per ASTM A653 CS or SS G90
<b>Hot Dip Galvanized After Fabrication</b>	Plain steel which is hot dipped after fabrication per ASTM A123
<b>Stainless Steel</b>	Type 304 or 316L fully annealed stainless steel

#### NEC Permitted (types of cables)

- Power and Control Tray Cable (Type TC) - NEC Article 336
- Power Limited Tray Cable (Type PLTC) - NEC Sections 725-61© and 725.82(E)
- Instrument Tray Cable (Type ITC) - NEC Article 727
- Optical Fiber Cables - Article 770
- Fire Alarm Circuit Conductors - Article 760
- Communication Cables - Article 800
- Mineral Insulated (MI)Cable - Article 332
- Metal Clad (MC) Cable - Article 330

#### UL Certified

- This category covers cable trays intended for assembly in the field and for use in accordance with Article 392 of ANSI/NFPA 70,"National Electrical Code" (NEC). Newlink Cabletrays have been certified as to their suitability for use as equipment grounding conductors in accordance with Sections 392.60(A) and 392.60(B) of the NEC.

#### Ordering Information:

P/N	Description	Includes	Set	Finish	Measurement
NEW-8504029	Newlink Cable Tray	(1) Cable Tray 4"	1	Electro Zinc	2" x 4" x 2.9mts
NEW-8506029	Newlink Cable Tray	(1) Cable Tray 6"	1	Electro Zinc	2" x 6" x 2.9mts
NEW-8508029	Newlink Cable Tray	(1) Cable Tray 8"	1	Electro Zinc	2" x 8" x 2.9mts
NEW-8512029	Newlink Cable Tray	(1) Cable Tray 12"	1	Electro Zinc	2"x12" x 2.9mts

(\*) NEWMAX-25 Year Certification applies when a complete Newlink Cabling Channel is installed.