


24-Port Cat 6A UTP Modular Angular Patch Panel

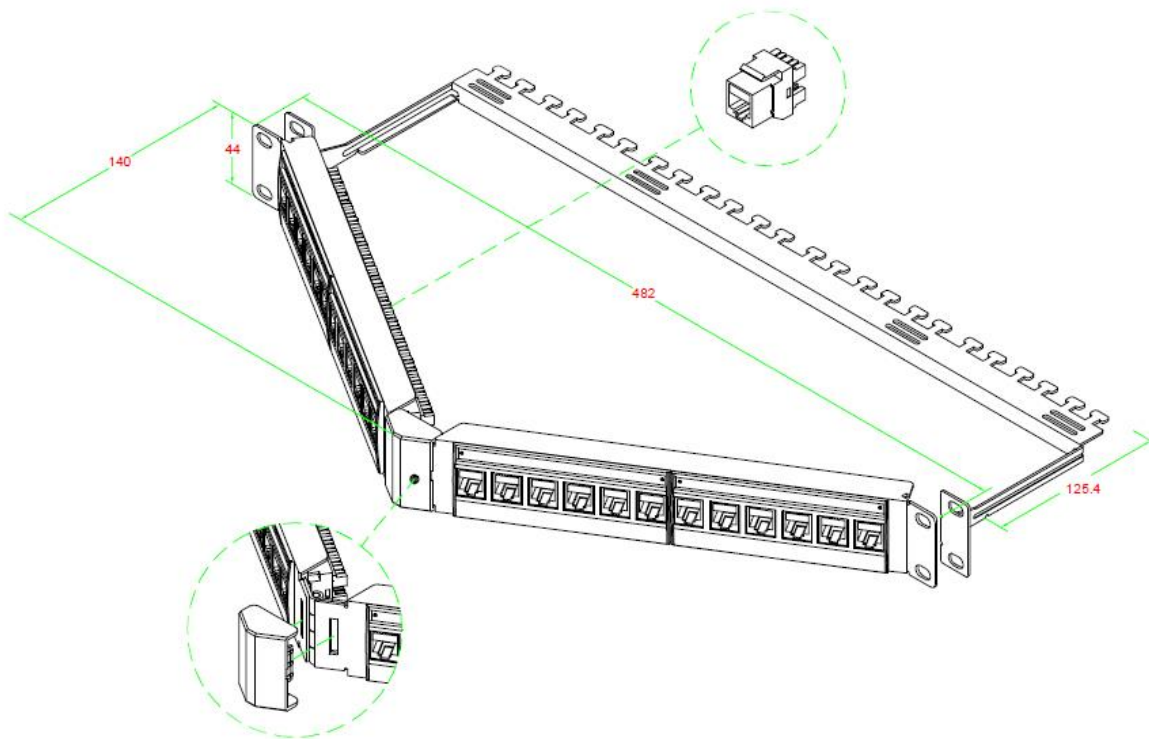

Technical Specifications:

Performance:	Meets Cat-6A EIA/TIA 568C Standard
Materials:	
Front Panel:	Fireproof ABS UL-94V0
Panel:	Metal (SPCC)
Cable Management:	Metal (SPCC)
Angled Block:	Fireproof ABS UL-94V0
Label Cover:	Fireproof PC
Keystone Body:	Fireproof ABS UL-94V0
Jack:	8P8C 50 micro inches gold plated
PCB:	FR-4 / UL-94V0
IDC Body:	Fireproof ABS UL-94V0
IDC Pin:	Bronze & Tinned
IDC Description:	For 22-26 AWG. For 110 or Krone punch-down Tool

Electrical Characteristics:

Insulation Resistance : 500M ohms (min.)

Contact Resistance: 20m ohms (max.)

Current Rating : 1.5 Amps

DC Resistance: 0.1 ohms (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

- Operation Temperature: -40 °C ~ +70 °C
- Jack Insertion Cycle: Over 2000 Cycles (min.)
- IDC Punch Down Cycle: Over 250 Cycles (min.)

Ordering Information:

Part Number	Description
NEW-2773324	24-Port Cat 6A UTP Modular Angular Patch Panel