
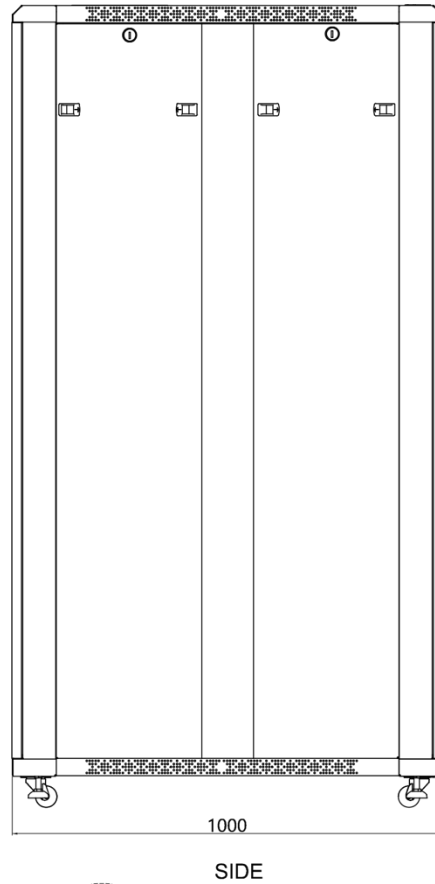




27RU (51") Cabinet, Ventilated Doors, 4 fans, power strip, 2 shelves

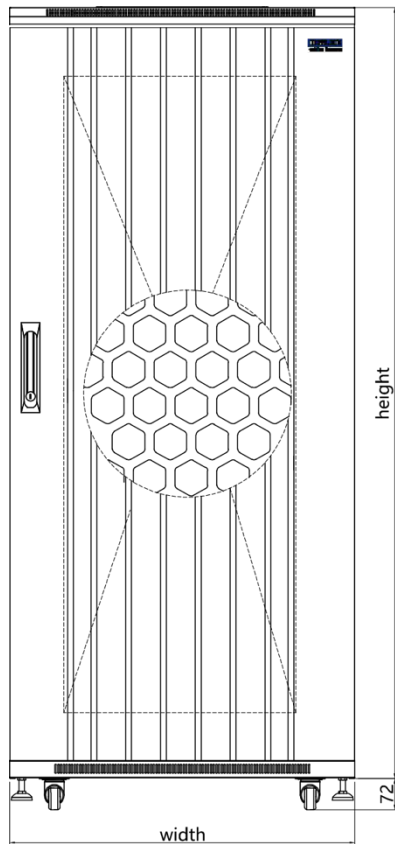

Standards:	ANSI/EIA RS-310-DIEC60297-2DIN41494; PART1 DIN41494; PART7
Material:	SPCC Cold Rolled Steel; rails2.0mm; others: 1.2mm
Loading capacity:	Static loading: 800KG

Features:

- Flat packing and patent frame, packing time is less than 20 minutes.
- Stylish design with precise dimensions and craftsmanship.
- Adjustable feet and heavy-duty castors are available simultaneously.
- Cable entry on the top cover and bottom panel with adjustable sizes.
- Optional installation of plinth to enable cabinets fixation, under-base cable entry/ventilation.
- Efficient and reliable cabinet connection by baying kit.
- Removable side panels
- Capacity: 27RU
- Dimensions: W:800mm, D: 1000mm, H: 1299mm

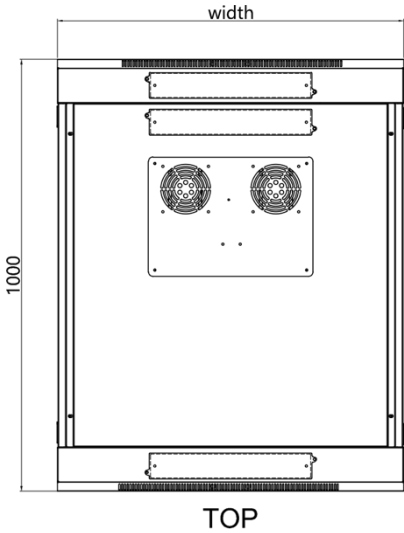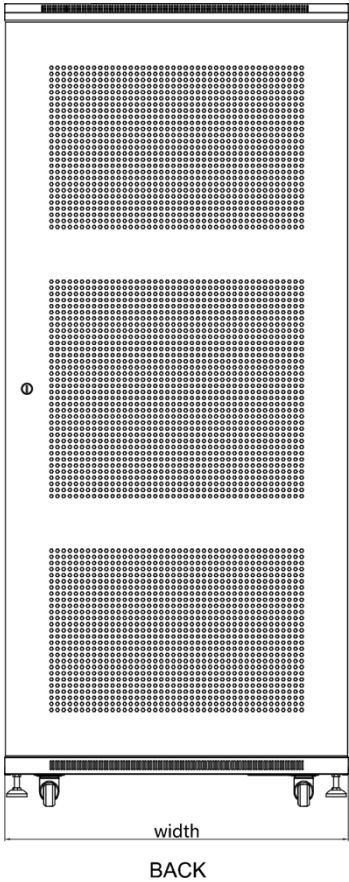

Ordering Information:

Part Number	Description
-------------	-------------

NEWLINK

Cabling Systems

NEW-0951401-SL

NEW-0951401-SL 27RU (51") Cabinet, Ventilated Doors, 4 fans, power strip, 2 shelves